PHOENIX Departure (R) 120.7	Apt Elev 1394	Trans alt: 18000 **1. GPS required.** **2. RNAV 1.**

SACAT 3 RNAV DEPARTURE (SACAT3.SACAT)

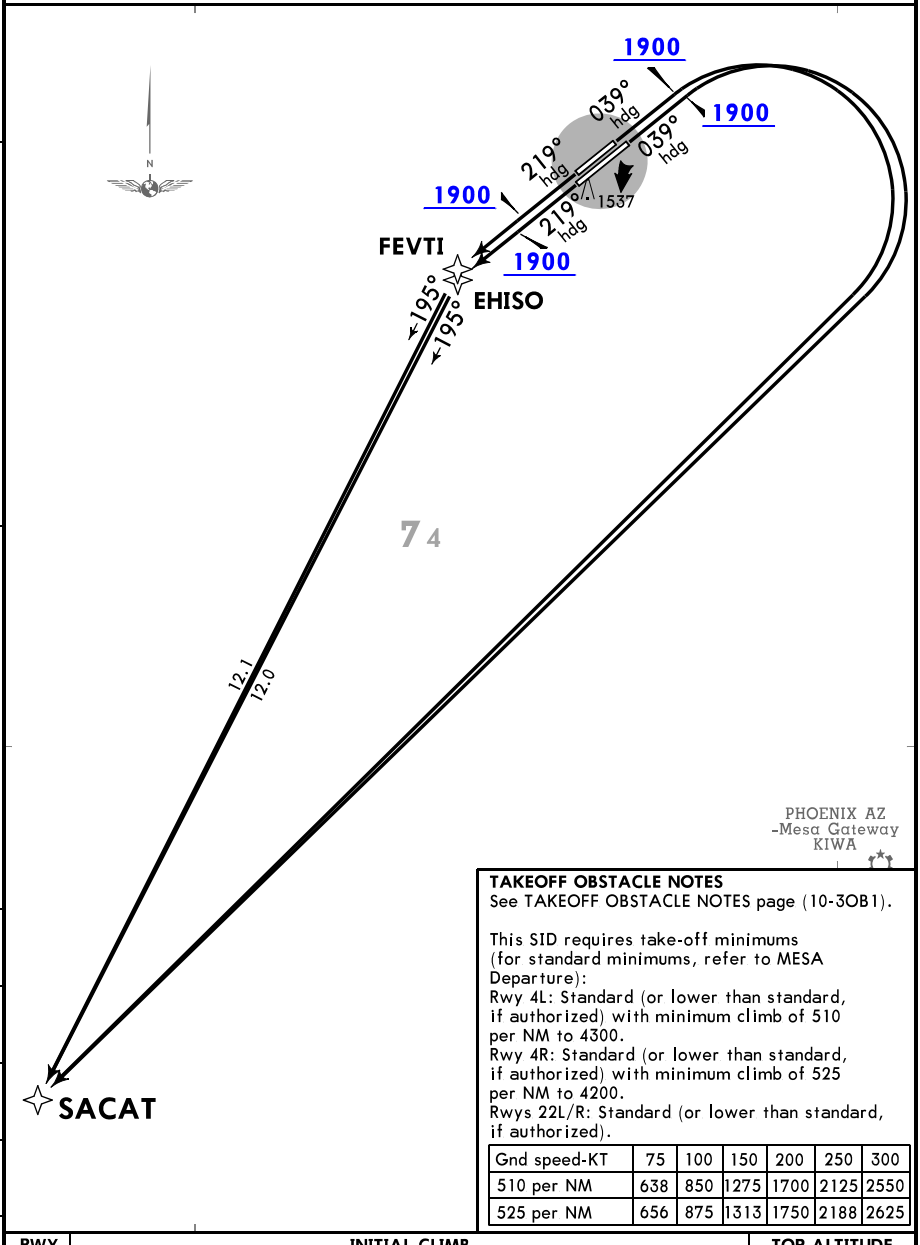

TAKEOFF OBSTACLE NOTES
See TAKEOFF OBSTACLE NOTES page (10-3OB1).

This SID requires take-off minimums (for standard minimums, refer to MESA Departure):
Rwy 4L: Standard (or lower than standard, if authorized) with minimum climb of 510 per NM to 4300.
Rwy 4R: Standard (or lower than standard, if authorized) with minimum climb of 525 per NM to 4200.
Rwys 22L/R: Standard (or lower than standard, if authorized).

Gnd speed-KT	75	100	150	200	250	300
510 per NM	638	850	1275	1700	2125	2550
525 per NM	656	875	1313	1750	2188	2625

RWY	INITIAL CLIMB	TOP ALTITUDE
4L/R	Climb heading 039° to 1900 then climbing RIGHT turn direct SACAT.	Assigned by ATC
22L	Climb heading 219° to 1900 then direct EHISO then on track 195° to SACAT.	
22R	Climb heading 219° to 1900 then direct FEVTI then on track 195° to SACAT.	

ROUTING

At SACAT MAINTAIN 5000, EXPECT clearance to filed altitude/flight level 10 minutes after departure.

1 in=2.5 NM

CHANGES: New format.

© JEPPESEN, 2018. ALL RIGHTS RESERVED.

Reproduced with permission of Jeppesen. NOT FOR NAVIGATIONAL USE. © Jeppesen, 2018